




# Model: Solatube 160 DS (10 in. /250 mm Daylighting System)

Project: \_\_\_\_\_

Location: \_\_\_\_\_


Type: \_\_\_\_\_

Product Specifications Appear in CSI Division 08, Section 08 62 23. For budgeting and quotations use only. Qty: \_\_\_\_\_

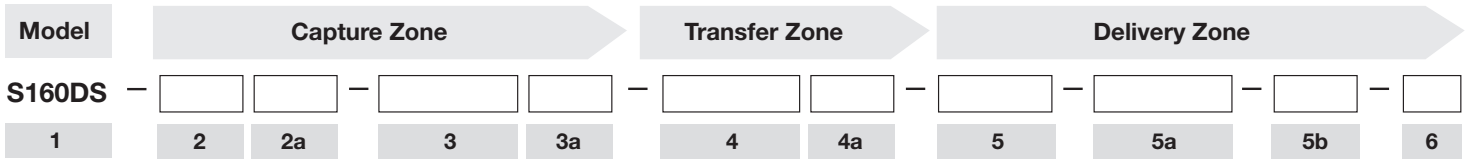

## 1 Model

**160 DS Brighten Up®** Solatube 160 DS (250 mm/10 in Daylighting System)



## Capture Zone

### 2 Domes

**DA** Acrylic Dome      **DAI** Acrylic Dome + Shock Inner Dome (Acrylic)  
Required for High Velocity Hurricane Zones

### 2a Dome Options (Leave blank if not desired)

**PB** Dome Edge Protection Band

### 3 Flashings

<b>FP</b> 4 in. (100mm) Pitched Metal, Self Mounted		<b>F4</b> 4 in. (100mm) Flat/No Pitch Metal, Self Mounted		<b>F6</b> 6 in. (150mm) Flat/No Pitch Metal, Self Mounted	
<b>FPT</b> 4 in. (100mm) Tile Roof, Pitched Metal Flashing		<b>FT</b> 4 in. (100mm) Tile Roof, No Pitch Metal Flashing			

### 3a Flashing Options (Leave blank if not desired)

<b>T2*</b> Roof Flashing Turret Extension 2 in. (50 mm)	<b>T36*</b> Roof Flashing Turret Extension 36 in. (900 mm)
<b>T4*</b> Roof Flashing Turret Extension 4 in. (100 mm)	<b>T48*</b> Roof Flashing Turret Extension 48 in. (1200 mm)
<b>T12*</b> Roof Flashing Turret Extension 12 in. (300 mm)	<b>FI</b> Flashing Insulator
<b>T24*</b> Roof Flashing Turret Extension 24 in. (600 mm)	<b>MR</b> Metal Roof Installation Kit


\* Specify additional extension tubes in #4

## Transfer Zone

### 4 Extension Tubes Required

Run measured from top of roof deck to bottom of ceiling plane along centerline of tubing.

- |  |  |
|--|--|
| <b>E0</b> Base Kit, No Tubes – Max Run = 16 in. (400mm)      | <b>E7</b> Seven Extension Tubes – Max Run = 170 in. (4320 mm)      |
| <b>E1</b> One Extension Tube – Max Run = 38 in. (965mm)      | <b>E8</b> Eight Extension Tubes – Max Run = 192 in. (4875 mm)      |
| <b>E2</b> Two Extension Tubes – Max Run = 60 in. (1525 mm)   | <b>E9</b> Nine Extension Tubes – Max Run = 214 in. (5435 mm)       |
| <b>E3</b> Three Extension Tubes – Max Run = 82 in. (2080 mm) | <b>E10</b> Ten Extension Tubes – Max Run = 236 in. (5995 mm)       |
| <b>E4</b> Four Extension Tubes – Max Run = 104 in. (2640 mm) | <b>EXX</b> Total Run Length to be Determined by Bidding Contractor |
| <b>E5</b> Five Extension Tubes – Max Run = 126 in. (3200 mm) |  |
| <b>E6</b> Six Extension Tubes – Max Run = 148 in. (3760 mm)  |  |

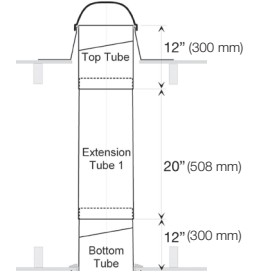






Assuming 6 in. (150 mm) high no-pitch flashing

### 4a Extension Tube Options (Leave blank if not desired)

- |   |                                   |
|---|-----------------------------------|
| <b>A1</b> One 0-90 Degree Extension Tube (Angle Adapter)  | <b>E</b> Wire Suspension Kit      |
| <b>A2</b> Two 0-90 Degree Extension Tubes (Angle Adapter) | <b>SCG</b> Severe Climate Glazing |

## Delivery Zone

### 5 Diffusers/Decorative Fixtures\*

- |  |  |  |  |
|--|--|--|--|
| <b>L1</b> Classic OptiView® Diffuser      | <b>L4</b> Classic Vusion™ Diffuser  | <b>L9</b> JustFrost Decorative Fixture  | <b>L10</b> TierDrop Decorative Fixture  |
| <b>L11</b> OptiView® Decorative Fixture  |  |  |  |

### 5a Effect Lenses

- |                                 |                                       |
|---------------------------------|---------------------------------------|
| <b>LN</b> Natural Effect Lens   | <b>LW</b> Warming Effect Lens         |
| <b>LS</b> Softening Effect Lens | <b>LWS</b> Warm Softening Effect Lens |

### 5b Options (Leave blank if not desired)

- |  |   |
|--|---|
| <b>INC</b> Universal Light Add-On Kit with Medium Screw Base (Accepts one 23W Maximum Fluorescent Lamp, Medium Base, Total Maximum Length 4 3/4 in. (120 mm) - Not Included) 110 V | <b>D</b> Daylight Dimmer™                   |
|  | <b>VEN</b> Ventilation Add-On Kit (110 V)   |
|  | <b>RV</b> Roof Vent Cap for Ventilation Kit |
|  | <b>D1</b> 0-10V Daylight Dimmer             |

### 6 Measurement Standard

- |                 |                   |
|-----------------|-------------------|
| <b>M</b> Metric | <b>I</b> Imperial |
|-----------------|-------------------|

### 7 Accessories (Order separately.)

- S1** Low voltage 0-10V switch (white) required to operate Solatube 010V Daylight Dimmers. Only one switch per forty-eight (48) synchronously controlled dimmers. (For 'D1' only) Note: For use when no controls have been specified and customer is looking for an off-the-shelf solution.
- SW** Low voltage switch (white) required to operate Solatube Daylight Dimmers. Note: Only one switch is required per ten (10) synchronously controlled dimmers. (For 'D' only)
- CA** Two Conductor Low Voltage Cable 500 ft. (150 m) (For 'D' only)

### Example

#### S160DS-DA-F6-E3-L9 LN D INC-M

Brighten Up® Series Solatube 160 DS (250 mm/10 in Daylighting System), Acrylic Dome, 6 in. (150 mm) high Flat/No Pitch Self Mounted Flashing, 3 Extension Tubes, JustFrost Decorative fixture, Natural Effect Lens, Daylight Dimmer and Universal Light Add-On Kit with Medium Screw Base. For metric installations.