





Model: Solatube 290 DS (14 in. /350 mm Daylighting System)

Project: _____

Location: _____

Type: _____

Product Specifications Appear in CSI Division 08, Section 08 62 23. For budgeting and quotations use only. Qty: _____

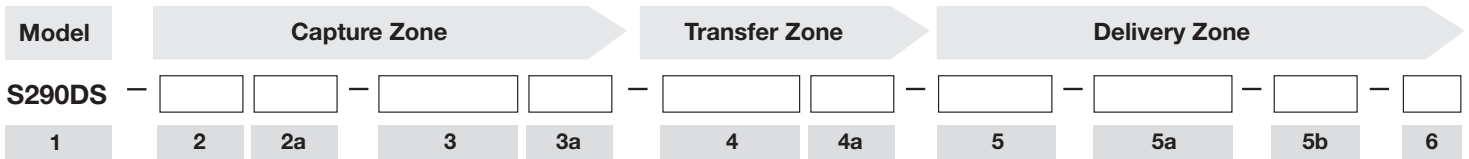

1 Model

290 DS Brighten Up® Solatube 290 DS 14 in./350 mm Daylighting System)

Capture Zone




2 Domes (Leave blank if not desired)

DA Acrylic Dome **DAI** Acrylic Dome + Shock Inner Dome (Acrylic)
Required for High Velocity Hurricane Zones

2a Dome Options (Leave blank if not desired)

PB Dome Edge Protection Band

3 Flashings

| | | | | | |
|--|---|--|--|--|---|
| FP 4 in. (100mm) Pitched Metal, Self Mounted |  | F4 4 in. (100mm) Flat/No Pitch Metal, Self Mounted |  | F6 6 in. (150 mm) Flat/No Pitch Metal, Self Mounted |  |
| FPT 4 in. (100mm) Tile Roof, Pitched Metal Flashing |  | FT 4 in. (100mm) Tile Roof, No Pitch Metal Flashing |  | FC Curb Cap (curb by others) |  |
| F1.5 1.5-inch (38 mm) Flat/No Pitch Metal, Self Mounted |  | | | | |

3a Flashing Options (Leave blank if not desired)

- | | |
|---|--|
| T2* Roof Flashing Turret Extension 50 mm/2 in | T48* Roof Flashing Turret Extension 1200 mm/48 in |
| T4* Roof Flashing Turret Extension 100 mm/4 in | FI Flashing Insulator |
| T12* Roof Flashing Turret Extension 300 mm/12 in | MR Metal Roof Installation Kit |
| T24* Roof Flashing Turret Extension 600 mm/24 in | CCI Curb Cap Insulation |
| T36* Roof Flashing Turret Extension 900 mm/36 in | |


* Specify additional extension tubes in #4

Transfer Zone

4 Extension Tubes Required

Run measured from top of roof deck to bottom of ceiling plane along centerline of tubing.

- | | |
|--|--|
| E0 Base Kit, No Tubes – Max Run = 16 in. (400 mm) | E7 Seven Extension Tubes – Max Run = 170 in. (4320 mm) |
| E1 One Extension Tube – Max Run = 38 in. (965 mm) | E8 Eight Extension Tubes – Max Run = 192 in. (4875 mm) |
| E2 Two Extension Tubes – Max Run = 60 in. (1525 mm) | E9 Nine Extension Tubes – Max Run = 214 in. (5435 mm) |
| E3 Three Extension Tubes – Max Run = 82 in. (2080 mm) | E10 Ten Extension Tubes – Max Run = 236 in. (5995 mm) |
| E4 Four Extension Tubes – Max Run = 104 in. (2640 mm) | EXX Total Run Length to be Determined by Bidding Contractor |
| E5 Five Extension Tubes – Max Run = 126 in. (3200 mm) | |
| E6 Six Extension Tubes – Max Run = 148 in. (3760 mm) | |










Assuming 6 in. (150 mm) high no-pitch flashing

4a Extension Tube Options (Leave blank if not desired)

- | | |
|---|-----------------------------------|
| A1 One 0-90 Degree Extension Tube (Angle Adapter) | E Wire Suspension Kit |
| A2 Two 0-90 Degree Extension Tubes (Angle Adapter) | SCG Severe Climate Glazing |

Delivery Zone

5 Diffusers/Decorative Fixtures*

- | | | | |
|--|--|---|---|
| L1 Classic OptiView® Diffuser  | L4 Classic Vusion™ Diffuser  | L9 JustFrost Decorative Fixture  | L15 AuroraGlo Decorative Fixture (White)  |
| L11 OptiView® Decorative Fixture  | L10 TierDrop Decorative Fixture  | L16 AuroraGlo Decorative Fixture (Bronze)  | |

*Must order Effect Lens; does not come standard

5a Effect Lenses

- | | |
|---------------------------------|---------------------------------------|
| LN Natural Effect Lens | LW Warm Effect Lens |
| LS Softening Effect Lens | LWS Warm Softening Effect Lens |

5b Options (Leave blank if not desired)

- | | |
|--|---------------------------------|
| INC Universal Light Add-On Kit with Medium Screw Base (Accepts one 23W Maximum Fluorescent Lamp, Medium Base, Total Maximum Length 4 ¾ in. (120 mm) - Not Included) 110 V | D Daylight Dimmer™ |
| | D1 0-10V Daylight Dimmer |

6 Measurement Standard

- | | |
|-----------------|-------------------|
| M Metric | I Imperial |
|-----------------|-------------------|

7 Accessories (Order separately.)

- SW** Low voltage switch (white) required to operate Solatube Daylight Dimmers. Note: Only one switch is required per ten (10) synchronously controlled dimmers. (For 'D' only)
- CA** Two Conductor Low Voltage Cable 500 ft. (150 m) (For 'D' only)
- S1** Low voltage 0-10V switch (white) required to operate Solatube 010V Daylight Dimmers. Only one switch per forty-eight (48) synchronously controlled dimmers. (For 'D1' only) Note: For use when no controls have been specified and customer is looking for an off-the-shelf solution.

Example

S290DS-DA-F4-E4-L13 LN D CFL-M

Brighten Up® Series Solatube 290 DS (350 mm/14 in Daylighting System), Acrylic Dome, 4 in. (100 mm) high Flat/No Pitch Self Mounted Flashing, 4 Extension Tubes, AuroraGlo Decorative Fixture, Natural Effect Lens, Daylight Dimmer and Compact Fluorescent Light Add-On Kit. For metric installations.